MOBILE COMPACTOR

PT - PTGT

COMPACT SOLUTION FOR INDUSTRIAL AND COMMERCIAL WASTE

Suitable for processing all types of dry or wet waste (excluding wood, rubble, and scrap metal), the self-contained compactor combines efficient volume reduction with easy integration into customer sites. Its standard version requires no specific installation work and features compact dimensions, making it ideal for sites with limited space.
The PT self-contained compactor can be adapted to your operational needs and environment thanks to the various configurations, loading methods, and container sizes available (12 to 24 m^3).

18-ton compaction force

Large loading aperture

Tailor-made solution

CHOOSE OUR EQUIPMENT

Proven Industry Expertise
Since 1964, our companies have been among the leading manufacturers of high-quality balers and compactors in France and internationally. We have extensive experience working with manufacturers, retail chains, waste management professionals, and local authorities.

Tailor-made solutions
Our sales team and engineering department manage each project individually in order to provide the equipment best suited to your requirements. Our machines can be customized with numerous options such as bin lifters, different container sizes, and more.

Efficient after-sales service
We are the leading after-sales service provider for compaction equipment in France and offer dedicated international support solutions. Wherever you are in the world, we provide delivery, installation, maintenance, and repair services for your equipment.

Part of the Sulo Group
Since 2020, our companies have been part of the French Sulo Group. Sulo is a global leader in waste management and recycling solutions and the European leader in pre-collection waste solutions.

BENEFITS FOR YOU

Profitability
Ability to resell compacted waste and optimize transport capacity, resulting in reduced logistics costs.

Productivity
Thanks to our semi-automatic and automatic systems, your teams spend less time managing waste and can focus on other operational tasks.

Enhanced CSR commitment
Reduction of CO_2 emissions through fewer waste collections and improved waste sorting at source.

Optimized Working Environment
Space savings, cleaner operating areas, and reduced accident risks.

MOBILE COMPACTOR

PT - PTGT

IDEAL FOR INDUSTRIAL AND COMMERCIAL WASTE

- **Reliable & durable** : Thanks to its proven technology and robust design, the PT offers a long service life even under intensive use. The ram and bottom plates are made of abrasion-resistant Creusabro steel, while the intermediate steel plate provides exceptional strength and durability.
- **Easy of use** : Compaction cycles start automatically when waste is loaded. Alerts inform operators of the fill level, making collection scheduling easier.
- **Easy loading** : The PT features a large loading aperture for easy loading of waste, including bulky materials, especially in the GT version with its enlarged hopper.
- **High performance** : Its short 38-second cycle time is optimized for the rapid treatment of large waste volumes.
- **Hygiene** : The fully welded design prevents any leakage of waste or liquids.
- **Guaranteed Safety** : Our machines comply with CE, AFNOR, and INRS standards. Operator and component safety is ensured through an emergency stop system in case of malfunction and continuous electronic monitoring of ram position. Additional safety options are available, including safety cages, light barriers, badge access systems, keypad access, etc.

TECHNICAL SPECIFICATIONS*

	PT 12 à 24	PTGT 20
Container volume (m3)	12 à 24	20
Hopper opening (mm)	1430x1550	1430x1830
Compaction chamber depth (mm)	1315	1315
Ram height (mm)	466	544
Ram penetration (mm)	295	186
Volume evacuated per cycle (m3)	0.89	1.39
Compaction block volume without hopper (m3)	2.65	3.63
Compaction force (T)	18	18
Specific pressure (kg/cm²)	2.3	1.7
Cycle time (s)	38	42
Hourly throughput at 100% (m3)	83.9	119.3
Electrical power (kW)	4	4
Supply voltage (V)	400	400
Hydraulic oil capacity (L)	60	60
Total machine weight (kg)	PT 12 : 3820 PT 15 : 3970 PT 20 : 4250 PT 24 : 4550	4500

We reserve the right to modify specifications without prior notice.

Manual loading

Bin-lifter on platform

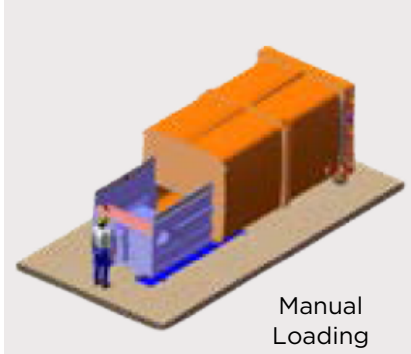
Manual Loading

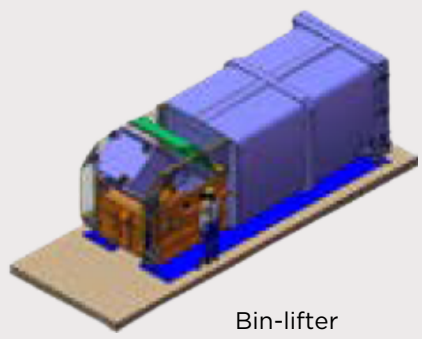
Bin-lifter

Configurations & options

Different configurations (dock, wall connection, platform), loading methods (manual, integrated bin lifter, forklift) and options (hopper size, container volume from 12 to 24 m³, ozone generator, remote control, rail systems, custom RAL color etc.).

DIMENSIONS

	PT 12	PT 15	PT 20	PT 24	PTGT 20
Length (mm)	5773	5773	6773	7573	6773
Width (mm)	2540	2540	2540	2540	2420
Height (mm)	2350	2650	2650	2650	2650

4 rue de la Taye - 28110 Lucé, FRANCE
adv.compacting@sulo.com
+33 2 37 88 19 19
after-sales : infos@savn1.fr

SACRIA
PART OF Sulo GROUP